



















Pedestrian Turnstile Promotion

2026

Speed Gate & Turnstile Family

★ New Release Ⓛ Delisting

Series	Swing Barrier			Flap Barrier	Tripod Turnstile			Full-height Turnstile
Ultra Series	 ASGB9xxS-x Swing Barrier							
Pro Series	 ASGB8xxH-x Swing Barrier	 ASGB8xxX-x Swing Barrier	 ★ ASGB6xxS-x Swing Barrier	 ASGY5xxC-x Flap Turnstile	 ASGT520T Tripod Turnstile			 ★ ASGQ520C Full-height Turnstile
	 ASGB6xxX-x Swing Barrier	 ASGB6xxY-x Swing Barrier	 ASGB5xxY-x Swing Barrier					 ★ ASGQ220C Full-height Turnstile
Lite Series	 ASGB2xxZ-x Swing Barrier	 ASGB2xxY-x Swing Barrier	 ASGB1xxK-x Swing Barrier	 ASGY1xxA-x Flap Barrier	 ASGG120T Tripod Turnstile	 ASGG1xxF Tripod Turnstile	 ASGG1xxB Tripod Turnstile	



Flap Barrier – Product Family

★ New Release Delisting

Series	Lite Series	Pro Series
Model	ASGY1xxA	ASGY5xxC
Product Image		
Motor	Brushless DC Motor	Brushless DC Motor
Cabinet Material	SUS304 0.8mm	SUS304 1.2mm
IR Detectors	4 pairs	12 pairs
Lock/Unlock Speed	0.7s	0.7s
Passage Frequency	20–60 people/min	20–60 people/min
MCBF	≥3 million times	≥5 million times
Passage Width	Standard: 600 mm	Standard: 600 mm
Barrier Material	Acrylic	Acrylic
Product Dimension	1200×280×980 (mm)	1400×280×980(mm)
Operating Environment	Indoor	Indoor; Outdoor
Protection	×	IPx4
Built-in card reader	√	√
Built-in access controller	√	√



- Pay attention to Flap barrier product selection

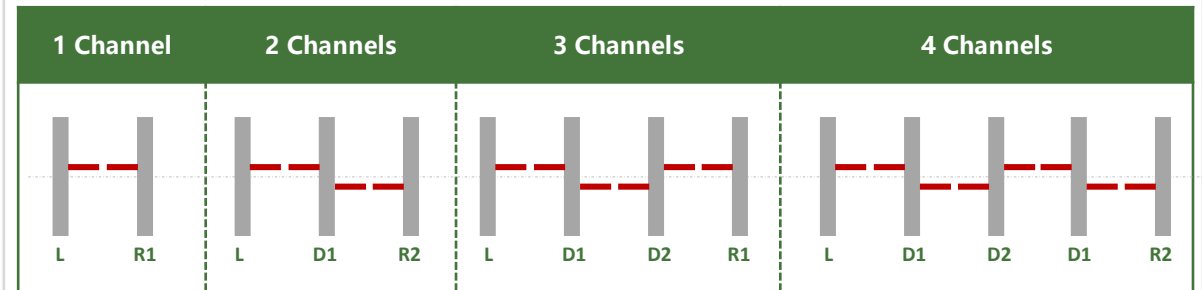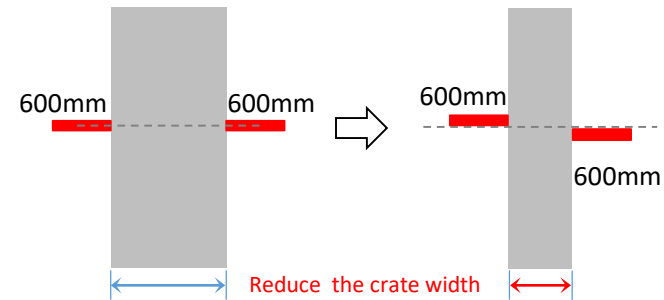







R1 → Barrier in the front.
R2 → Barrier in the back.

D1 → left barrier in the front and right barrier in the back.
D2 → left barrier in the back and right barrier in the front.



Tripod Turnstile – Product Family

★ New Release

Series	Lite Series					Pro Series
Model	ASGG100BL	ASGG120B	ASGG10xFL	ASGG12xF	ASGG120T	ASGG520T
Product Image	 ★	 ★	 ★	 ★		
Motor	N/A	N/A	N/A	N/A	N/A	N/A
Cabinet Material	Cold plat Cabinet Thickness 0.8mm Top Cover Thickness 1.2mm	Cold plat Cabinet Thickness 0.8mm Top Cover Thickness 1.2mm	SUS304 Cabinet Thickness 0.8mm Top Cover Thickness 1.2mm	SUS304 Cabinet Thickness 0.8mm Top Cover Thickness 1.2mm	SUS304 Cabinet Thickness 0.8mm Top Cover Thickness 1.2mm	SUS304 Cabinet Thickness 0.8 mm Top Cover Thickness: 1.5 mm
IR Detectors	/	/	/	/	/	/
Passage Frequency	20–30 people/min	20–30 people/min	20–30 people/min	20–30 people/min	20–30 people/min	20–40 people/min
MCBF	≥2 million times	≥2 million times	≥2 million times	≥2 million times	≥3 million times	≥3 million times
Passage Width	Standard: 600 mm	Standard: 600 mm	Standard: 600 mm	Standard: 600 mm	Standard: 550 mm	Standard: 550 mm
Barrier Material	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Product Dimension	350 x 300 x 950(mm)	350 x 300 x 950(mm)	350 x 300 x 950(mm)	350 x 300 x 950(mm)	1200×220×980(mm)	1200×220×980(mm)
Operating Environment	Indoor	Indoor	Indoor; Outdoor	Indoor; Outdoor	Indoor; Outdoor	Indoor; Outdoor
Protection	×	×	IPx4	IPx4	IPx4	IPx4
Built-in card reader	×	√	×	√	√	√
Built-in access controller	×	√	×	√	√	√

Full-height Turnstile – Product Family

★ New Release 🕒 Delisting

Series	Single Channel	Double Channel
Model	ASGQ220C	ASGQ520C
Product Image	 ★	 ★
Motor	N/A	N/A
Cabinet Material	SUS304 1.2mm	SUS304 1.2mm
IR Detectors	/	/
MCBF	≥3 million times	≥3 million times
Passage Width	Standard: 600 mm	Standard: 600 mm
Barrier Material	Stainless Steel	Stainless Steel
Product Dimension	1400×1300×2230 (mm)	2200×1300×2230(mm)
Operating Environment	Indoor; Outdoor	Indoor; Outdoor
Protection	IPx4	IPx4
User Capacity	100,000	100,000
Built-in card reader	√	√
Built-in access controller	√	√

High Security

Enclosed design and 2 meters height effectively blocking climbing and intrusion.

Flexible Authentication

Various authentication methods are available. The IC card is supported by default; face, fingerprint and QR code are optional.

Modular Assembly

>70% smaller packaging, reduces the shipping cost and easier installation after unboxing.

Face Recognition Terminal

Seamless Access Brings Convenient Passage



Fast

Provide a face recognition speed of less than 0.2 second per person.



Accurate

Offers 99.9% accuracy and strong adaptability to harsh environments.



Convenient

Offers touchless access, diverse installation options and multiple management interface.



Trusted

Equipped with anti-spoofing algorithm against photo and video attack.



Face Recognition Terminal



ASI6213D

- 4.3 inch touch screen
- 6,000 face capacity
- 10,000 card capacity
- Indoor



ASI6213S

- 4.3 inch touch screen
- 6,000 face capacity
- 10,000 card capacity
- Outdoor, IP65



ASI6213J-MW-V1

- 4.3 inch touch screen
- 20,000 face capacity
- 50,000 card capacity
- Outdoor, IP65



ASI7213S-W

- 7 inch touch screen
- 50,000 face capacity
- 100,000 card capacity
- Indoor



ASI7213K-W

- 7 inch touch screen
- 50,000 face capacity
- 100,000 card capacity
- Outdoor, IP65



ASI8213S-W-V1

- 8 inch touch screen
- 100,000 face capacity
- 500,000 card capacity
- Outdoor, IP65



ASF053-ZJ

- General Turnstile Bracket

DHI-ASGB9xxS-x Intelligent Integrated Gate (Indoor)



Ultimate Simplicity, Classy Appearance

- Intelligent integrated design
- Aviation process quality
- 360 ° flowing light, real-time display of traffic status



Improved Travel Experience

- Intelligent verification brings seamless passage
- Passing Speed: 20-60 people/min
- Unlock/Lock speed $\geq 0.5s$
- Passage width 600mm~1500mm



Stronger Stability & Durability

- DC servo Brushless motor
- MCBF ≥ 20 million times
- Algorithm optimization, infinitely variable speed, fast and stable



Upgraded Security

- IR anti-squeeze & mechanical anti-squeeze to guarantee travel safety;
- Fire alarms and power outages will trigger the door open, ensuring personnel safety;

Cabinet Material

Aluminum Material ,3.2mm

Verification Methods

Standard: Face, IC Card, QR code

Anti-squeeze

20 pairs of IR Curtain Sensors

10 pairs of IR Detectors

Status Indicator

360 ° flowing light

Barrier


Standard: Acrylic

Optional: Tempered Glass

Passage Width

Standard width: 600mm

Max width: 1500mm

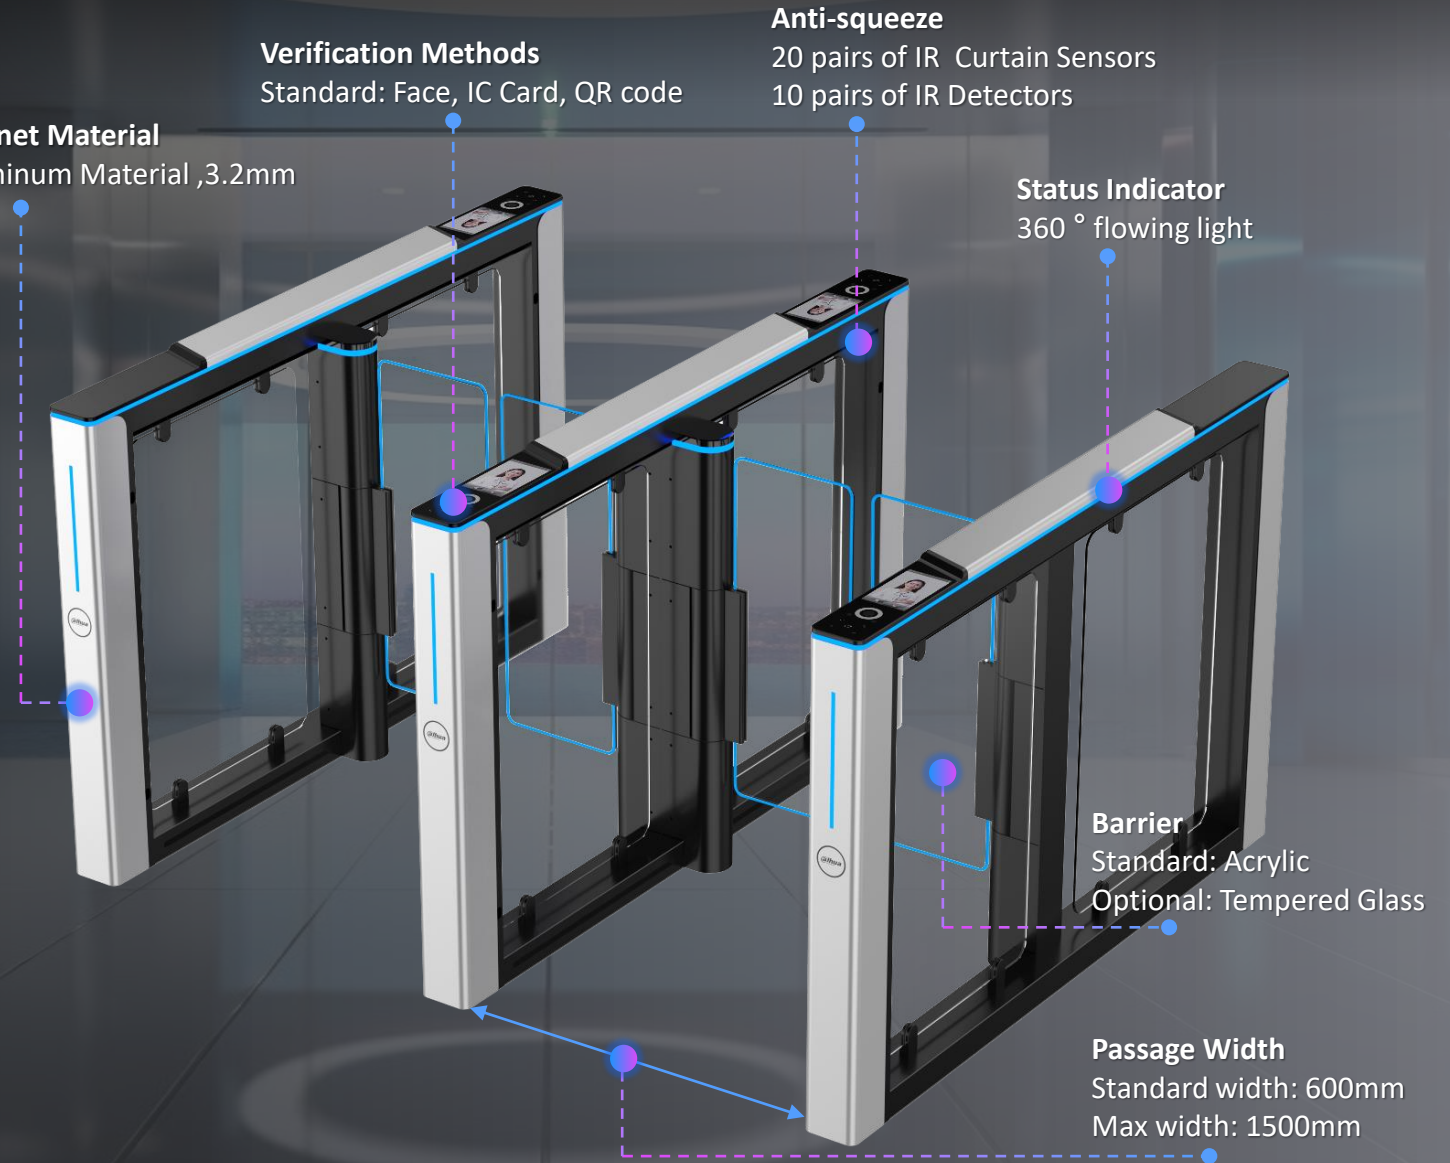

DHI-ASGB6xxS-x Intelligent Integrated Gate (Indoor)



All-in-one Design

The speed gate supports face recognition, card swiping and QR code.




Enhanced Experience

Wide angle dual-lens camera, 0.5s recognition, instant gate release.



Easy Installation


1 cable for main and sub gate signal synchronization.

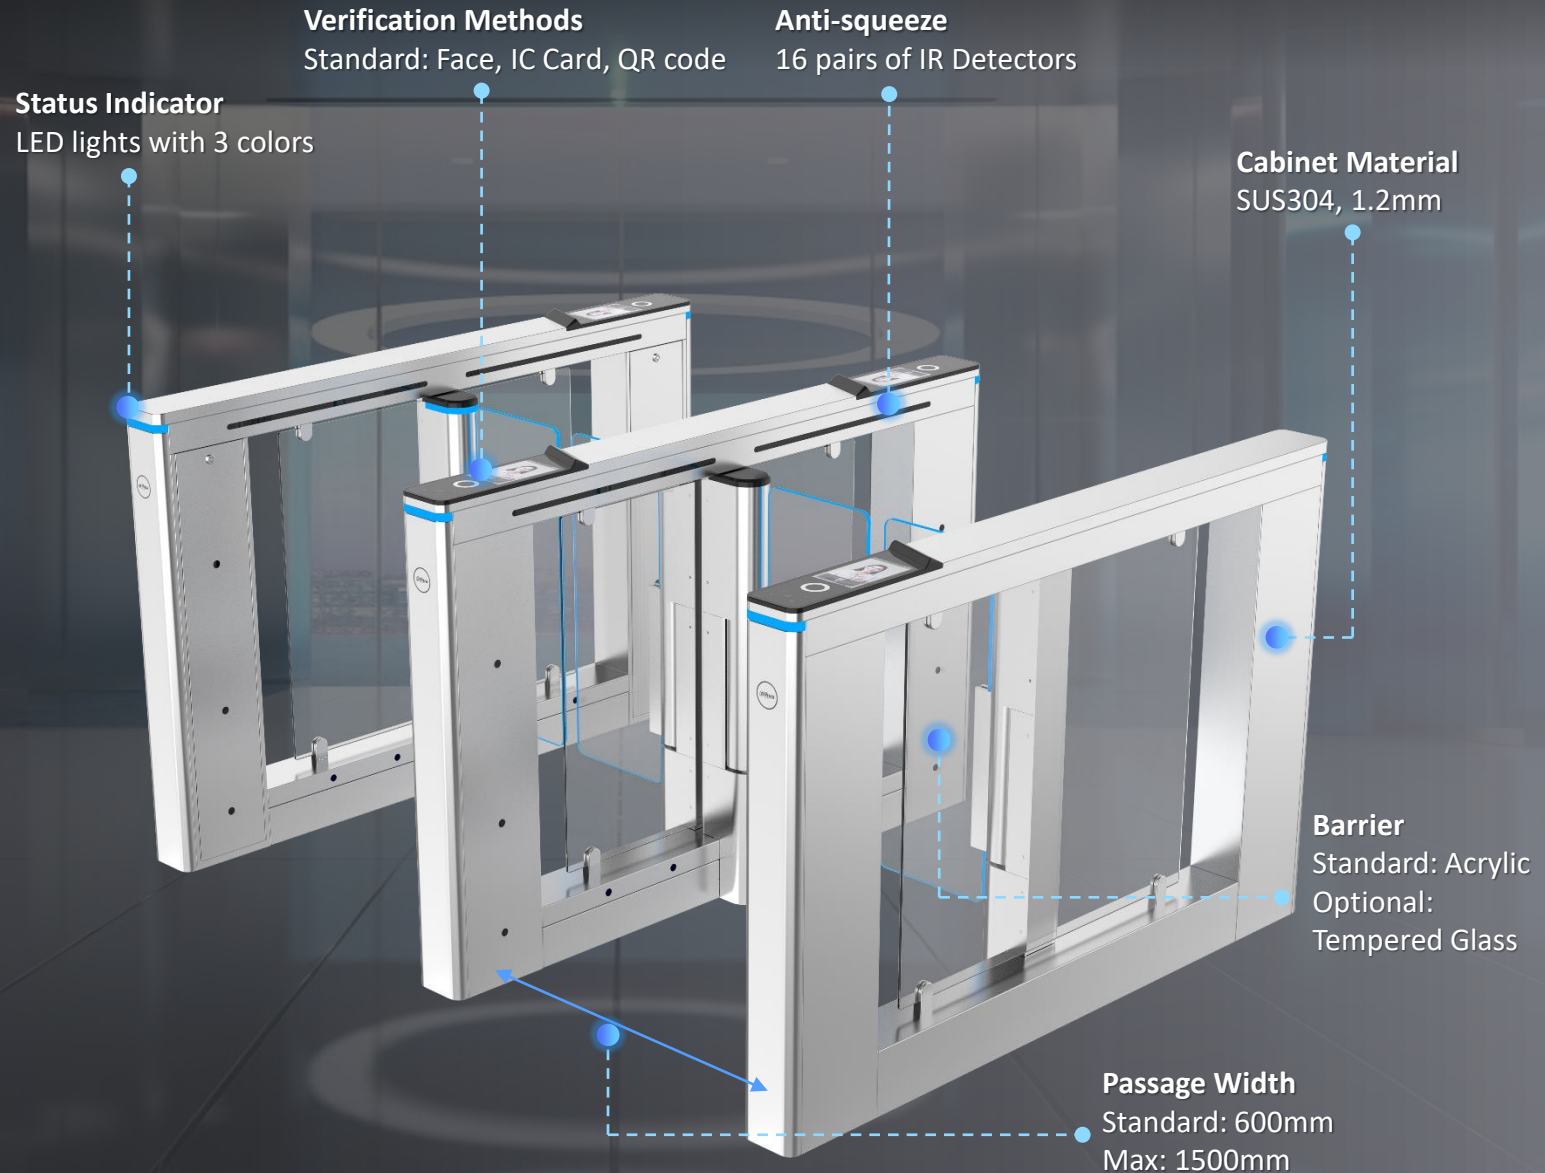

2026 New Auto Tripod Turnstile ASGG5Q Series



Front

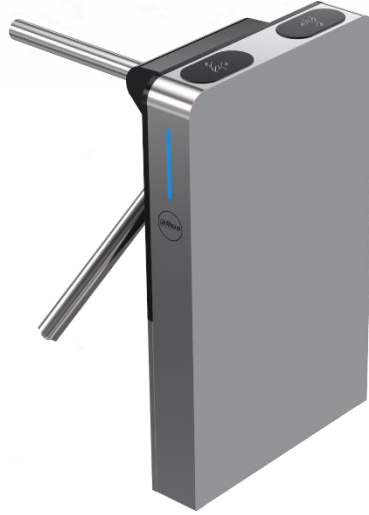

Right



Left

Cabinet Material	SUS304
Thickness	Top Cover: 1.5mm; Chassis: 1.5mm
MCBF	≥ 5 Million Times
Passage Frequency	20–60 people/min
Product Dimensions	600*130*980mm
Passage Width	550mm
Working Environment	Indoor, Outdoor (Optional)



Short Size, Spacing-saving Installation




Touch-free Roller, Easier to Use




No Noise, Enhance the Venue Experience

2026 New AB Swing Barrier ASGB2Z-AB Series

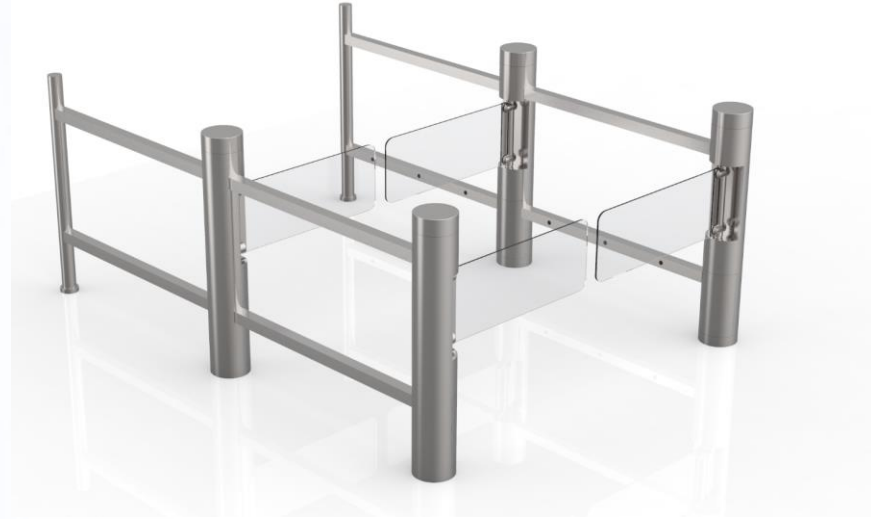

Appearance

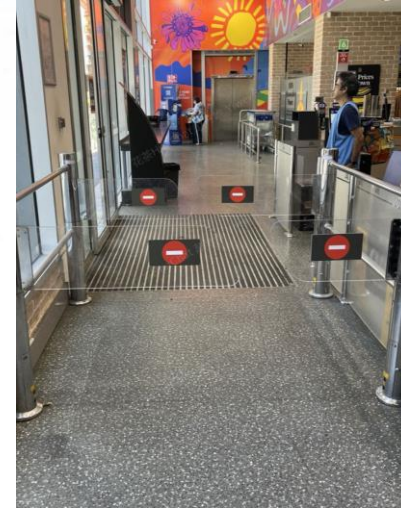

Scenario

Cabinet Material	SUS304
Thickness	Body: 2.2mm; Railing: 1.5mm
MCBF	≥ 5 Million Times
Motor	Brushless Servo Motor
Product Dimensions	2400*200*980mm
Unlock Speed	0.2S
Passage Width	900~1500mm
Sensors	1*Laser Sensor; 3*IR Detectors
Working Environment	Indoor



Ultra Wide Width for Shopping Carts





Precise Anti-pinch, Ensure Customer's Safety



Customizable Barrier Logo to Enhance Promotion Effect


System Topology

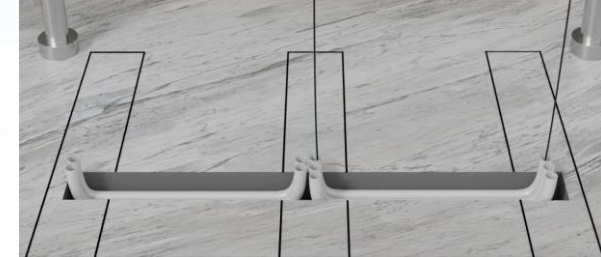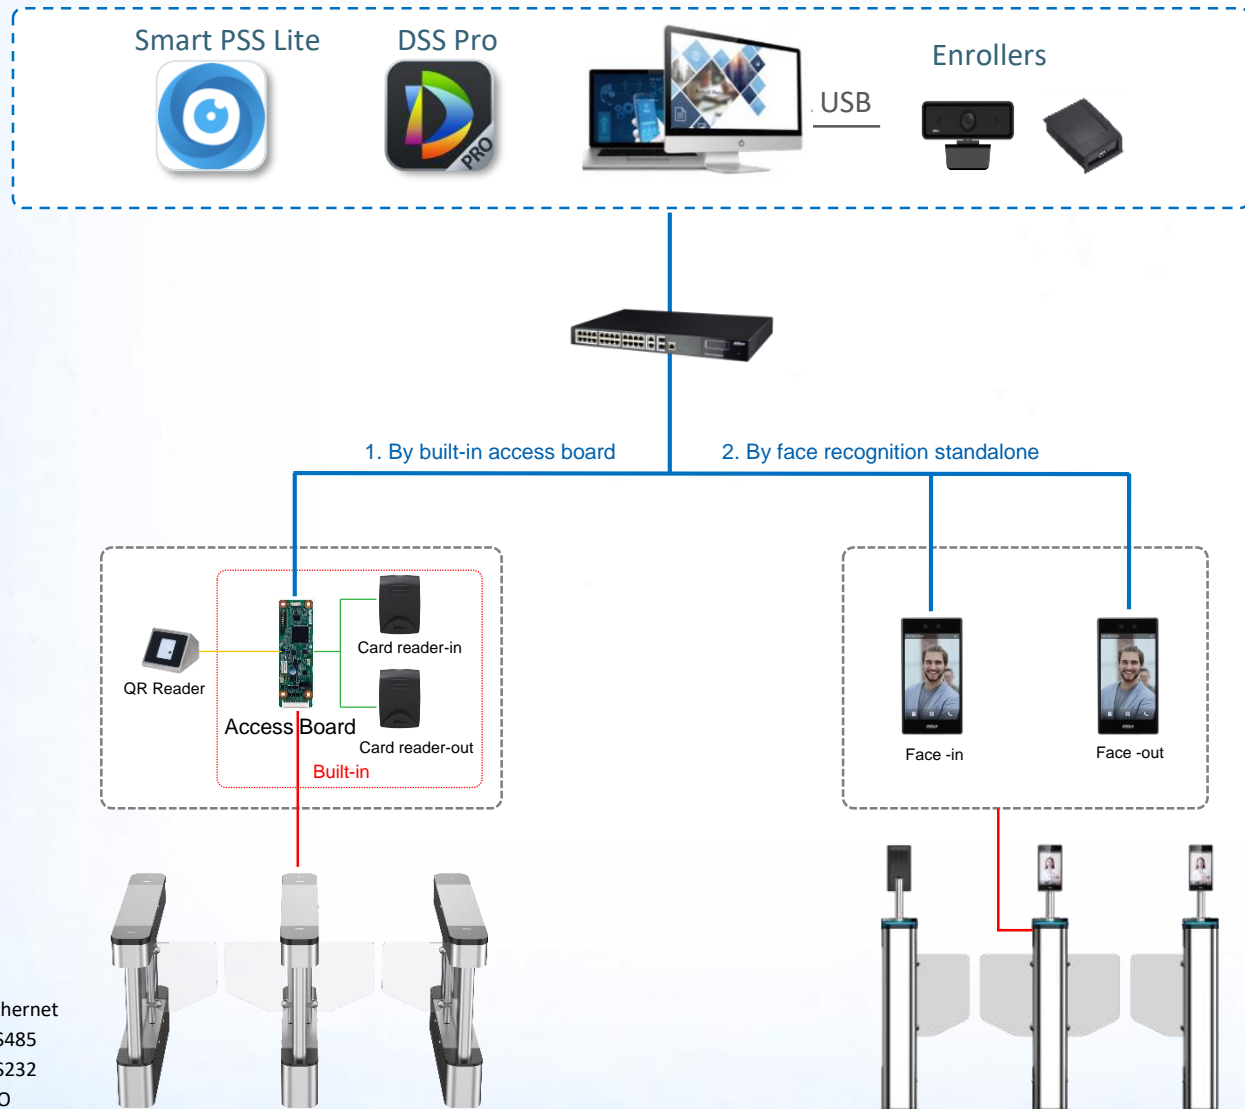

1. Reserve pipelines space for underground wiring



2. For turnstiles without standalones – open the cabinet to connect network cable

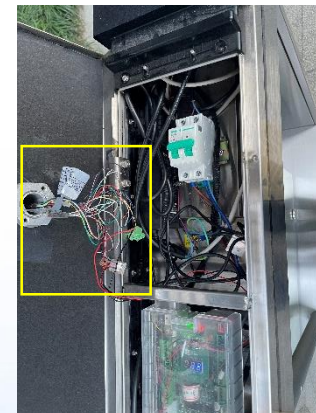

3. For turnstiles with standalones – wiring the cables through the installation bracket

Thanks for Your Watching